


# SAFEBATT WALL

The Perfect Solution For Residential and Commercial Energy Needs.

## SPECIFICATIONS

CERTIFICATION  
IEC62619:2022

AMP HOURS	200Ah
CHEMISTRY	LiFePO4
NOMINAL VOLTAGE	51.2V
NOMINAL CAPACITY	10.24kWhr
TEMPERATURE RANGE	-20-50c
CHARGE AND DISCHARGE	1C
MAXIMUM CHARGE RATE	200A
MAXIMUM DISCHARGE RATE	200A
CELL STRUCTURE	Prismatic
IP RATING	IP55
WARRANTY	5years Pro-Rata when online

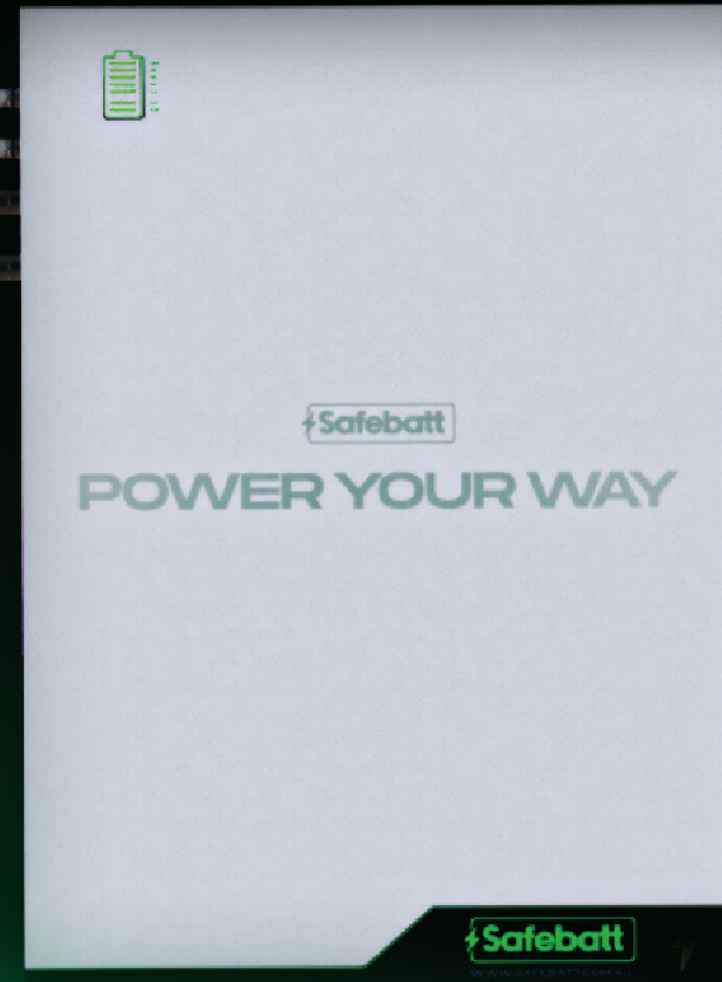

Designed with a compact, wall-mounted profile, SafeBatt seamlessly integrates with solar panel systems to capture and store surplus energy generated during peak production periods.